


Adaptor, SMA Female to BMA Female (BMA Jack)

P.N. : X-SMBM.18FF.1

Dimension

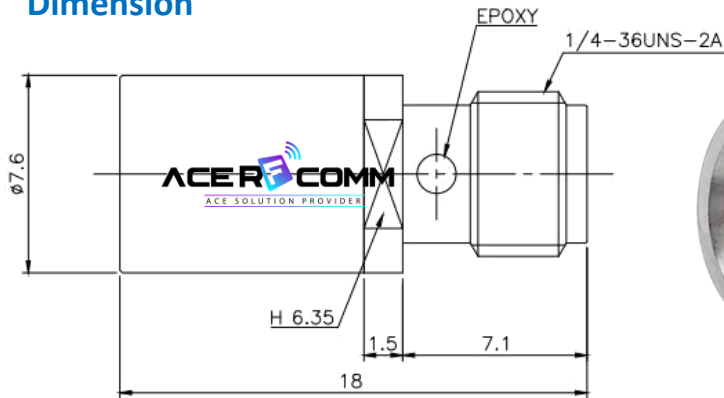

Photo



Electrical specification

Frequency Range	DC ~ 18GHz
Impedance	50 Ohm
V.S.W.R.	1.25 :1 Max.

Material specification

Connector Body	Try-Alloy Plating Brass
Connector Center Contact	Gold Plating Becu
Insulator	PTFE
Connector Mating	500 cycles

Environmental specification

Voltage rating	500 Vrms
Dielectric withstanding voltage	1500 Vrms
Contact retention	6 lbs axial
Operating Temperature	-50°C ~ 125 °C
RoHS	Compliant

Adaptor, SMA Female to BMA Female (BMA Jack)

P.N. : X-SMBM.18FF.1

Test Data

