


Attenuator, DC~8.5GHz, SMA 25Watt 20dB, Bi-directional

P.N. : A-0820.SM25.1

Dimension

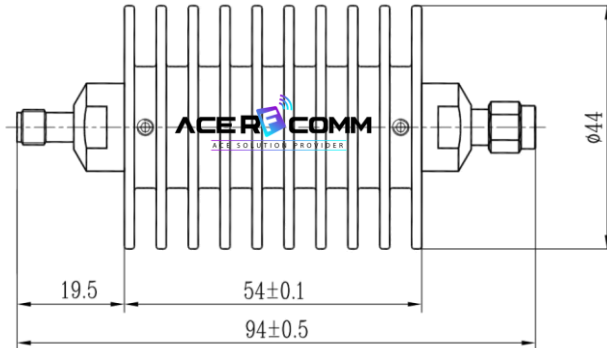

Photo/3D Image



Electrical & Environmental specification

Frequency Range	DC ~ 8.5GHz
Impedance	50 Ohm
Input Ave Power	25Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	1kW (5 µsec pulse width, 1% duty cycle)
Nominal Attenuation	20dB ± 0.8dB
V.S.W.R.	1.25 : 1 Max
Direction	SMA male to SMA female
Operating Temperature	-55°C ~ 125 °C

Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Housing	Black Anodizing, Aluminum
Weight	155 gram
Dimension	Ø44 * 94mm
RoHS	Complaint

Attenuator, DC~8.5GHz, SMA 25Watt 20dB, Bi-directional

P.N. : A-0820.SM25.1

Test Data

