


## Attenuator, DC~8GHz, N 2Watt 30dB, Bi-directional

P.N. : A-0830.NN02.1

### Dimension

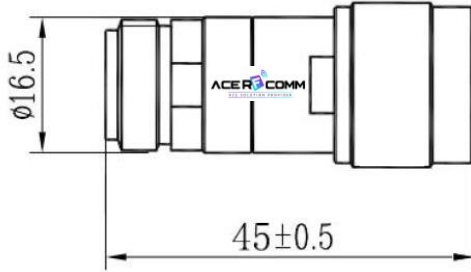

### Photo



### Electrical & Environmental specification

Frequency Range	DC ~ 8GHz
Impedance	50 Ohm
Input Ave Power	2Watt @ 25°C derated linearly to 0 watts @ 125°C
Peak Power	0.1kW ( 5 $\mu$ sec pulse width, 1% duty cycle)
Nominal Attenuation	30dB $\pm$ 1.0dB
V.S.W.R.	1.25 : 1 Max
Operating Temperature	-55°C ~ 125 °C

### Material specification

Connector Body	Tri-Alloy Plating Brass
Connector Center Contact (Male)	Gold Plating Brass
Connector Center Contact (Female)	Gold Plating BeCu
Connector Mating	500 cycles
Weight	54 gram
Dimension	$\text{Ø}16.5 * 45\text{mm}$
RoHS	Complaint